


# Environmental Product Declaration

in accordance with ISO 14025 and EN 15804

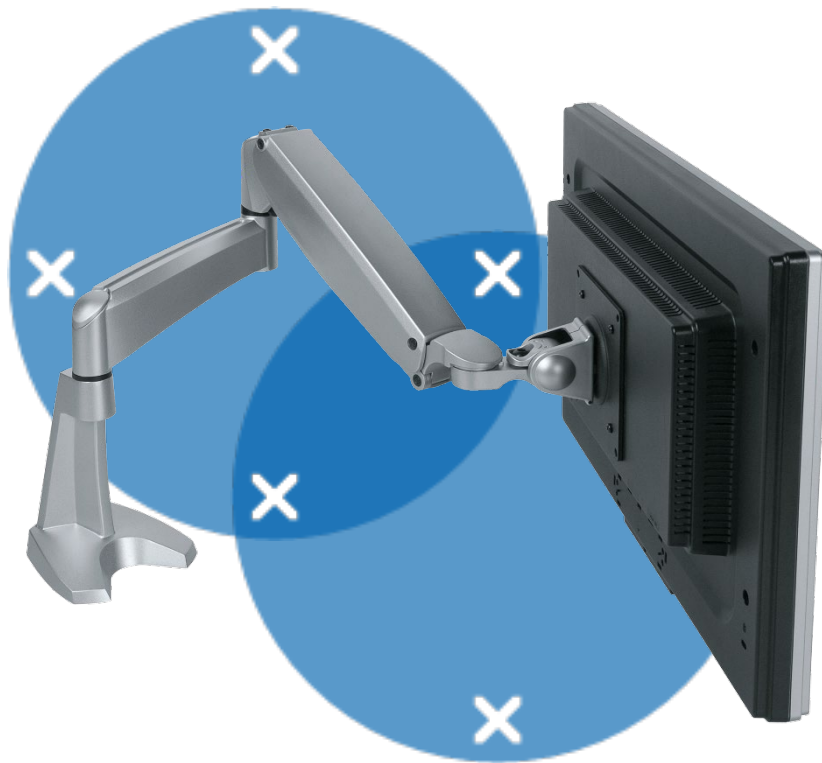

57.142

## Viewmaster monitor arm - desk 142

EPD Issue date	2019-02-08
EPD Expires on	2024-02-07
Market coverage	Europe

## General

This environmental product declaration (EPD) is based on the results of the Life Cycle Assessment (LCA) that was commissioned by Dataflex and performed by Ecochain. The LCA and EPD comply with the requirements of ISO 14040 [1], ISO 14044 [2] and ISO 14025 [3] and follow the rules set out in "INSIDE/INSIDE Horizontale PCR" [6] and "INSIDE/INSIDE PCR Accessoires" [7]. Both product category rules (PCR's) are based on EN15804:2012+A1:2013 [4].

EPD of interior design products may not be comparable if they do not comply with "INSIDE/INSIDE Horizontale PCR" [6].

### EPD Program

### inside inside

INSIDE/INSIDE  
Dutch Green Building Council  
Zuid Hollandlaan 7  
2596 AL Den Haag  
The Netherlands  
www.insideinside.com

### EPD Program operator

INSIDE/INSIDE

### EPD Owner/ Manufacturer

### dataflex

Dataflex International B.V.  
Van Nassauweg 2-6  
2921 LX Krimpen aan den IJssel  
The Netherlands  
www.dataflex-int.com

### EPD in accordance with

- INSIDE/INSIDE Horizontale PCR; version 1.2, 2018-12-10  
- INSIDE/INSIDE PCR Accessoires; version 1.1, 2018-12-12

### EPD type

Cradle to grave; no stages were omitted.

### LCA Report prepared by

### Ecochain

Maarten Bruinsma  
Environmental specialist  
Ecochain B.V.  
Burgerweeshuispad 201  
1076 GR Amsterdam  
The Netherlands  
www.ecochain.com

### Background data

Ecoinvent database version 3.4

### Year of study

2017

### EPD prepared by

Gijs Peeters  
QHSE Manager  
Dataflex International B.V.

### Demonstration of verification

CEN standard EN 15804 serves as the core PCR	
Independent verification of the declaration and data, according to EN ISO 14025:2010	
<input type="checkbox"/> internal	<input checked="" type="checkbox"/> external
Third party verifier: René Kraaijenbrink, LBP Sight	

## Company

At Dataflex we want to help you get the most out of yourself. This is why we want the place where you work to be a place where you feel at home. We call it 'feeling at work'.

Our product collections achieve the optimal balance between functionality, design and price. But while we help create ergonomic computer workplaces to suit every budget, we never compromise on quality.

## What makes us tick

As well as sustainable relationships, we also want to do our bit for a sustainable planet. We try hard to be transparent at all times, and always to operate with integrity and respect for society and our environment. And we like to work with partners who feel the same way.

## The Dataflex core values

We're honest and transparent, following not just the letter but the spirit of legislation and regulations.

We look to minimize the environmental impact of our products throughout their lifespan.

We try to do what's best by all our stakeholders, are open to criticism and seek out partners who share our core values. Why? Because we want to do things even better tomorrow than we do them today.

Better for those stakeholders, better for the planet and better for society.

Want to know more? Visit our website:

[www.dataflex-int.com](http://www.dataflex-int.com)

## Scope

### Reference unit

The declared functional unit encompasses the production, installation, use and waste processing of one Viewmaster monitor arm - desk 142 (art. no. 57.142) as sold by Dataflex

### Product description

Dynamic height adjustment and independent depth adjustment let each user find their own optimal ergonomic position. A high-end design for lighter monitors, that guides cables along the arm's extensions to create a tidy, professional impression.

### Specifications

- Dynamic height adjustment range of 305 mm
- Independent depth adjustment
- Partly integrated or concealed cable management
- Main components made of aluminium
- VESA MIS-D 75 x 75/100 x 100 mm compatible
- Monitor: tilt +90°/-90°, swivel +90°/-90°, rotate +90°/-90°
- Arm: swivel 360°
- Weight capacity min. 2,3 - max. 6,8 kg per monitor
- Comes with a desk clamp mount and bolt-through desk mount
- Suitable for a desktop thickness of 5 up to 55 (clamp) or 70 mm (bolt through)
- Monitor size limit: height 886 mm
- Built-in SUSPA® gas spring
- Listed weight capacity will vary when mounting monitors that are deeper than 25 mm or have an off-centre VESA mount
- The reference service life (RSL) is 5 years <sup>a</sup>

### List of materials Viewmaster monitor arm - desk 142

Materials		Quantity	Unit
Main body	EG cold roll steel	2,223	kg
	Powder coating steel	0.082	m <sup>2</sup>
	Paint, aluminium	0,008	kg
	Aluminium A380	1,659	kg
	Acrylonitrile butadiene styrene (ABS)	0,016	kg
	Polypropylene (PP)	0,018	kg
	Rubber	0,010	kg
Packaging materials	Nylon	0,003	kg
	Plastic packaging (PE)	0,023	kg
	Cardboard box	0,460	kg
Auxiliary materials	Dataflex cardboard	0,270	kg
	Manuals & product sheets	0,023	kg
	Dataflex instructions	0,020	kg
	Others	0,050	kg

Table 1: Composition 57.142

No material content of this product has substances of very high concern (SVHC's) that are listed on the "Candidate List of Substances of very high concern for authorization" exceeding the limits for registration with the European Chemicals Agency (ECHA).

## Data representation

Data concerning the manufacturing of the 57.142 and the used background processes for environmental impacts are recent (<2 years). All processing data has been modelled using Ecoinvent [8] (cut-off system model) references, released in 2017. Calculations were performed with Ecochain version 2.10 [5]

<sup>a</sup> Based on fixed RSL of "INSIDE/INSIDE PCR Accessoires" [7]

## Process description

The process tree consists of all processes that cause environmental impacts, such as material extraction and the transportation of these resources to the production facility. The processes and life cycle modules that are included in this study are defined by system boundaries. In the LCA the following stages are covered:

- Raw material supply (A1), transport to production facility (A2) and manufacturing (A3)
- Transport to the customer (A4) and the installation process (A5)
- Use phase (B)
- De-installation (C1), transport to waste processing site (C2), waste processing (C3) and disposal (C4)
- Reuse, recovery or recycling potential (D)

During the use of Dataflex products no consumption, emissions or environmental impacts take place. Phase B is therefore not included in the process tree.

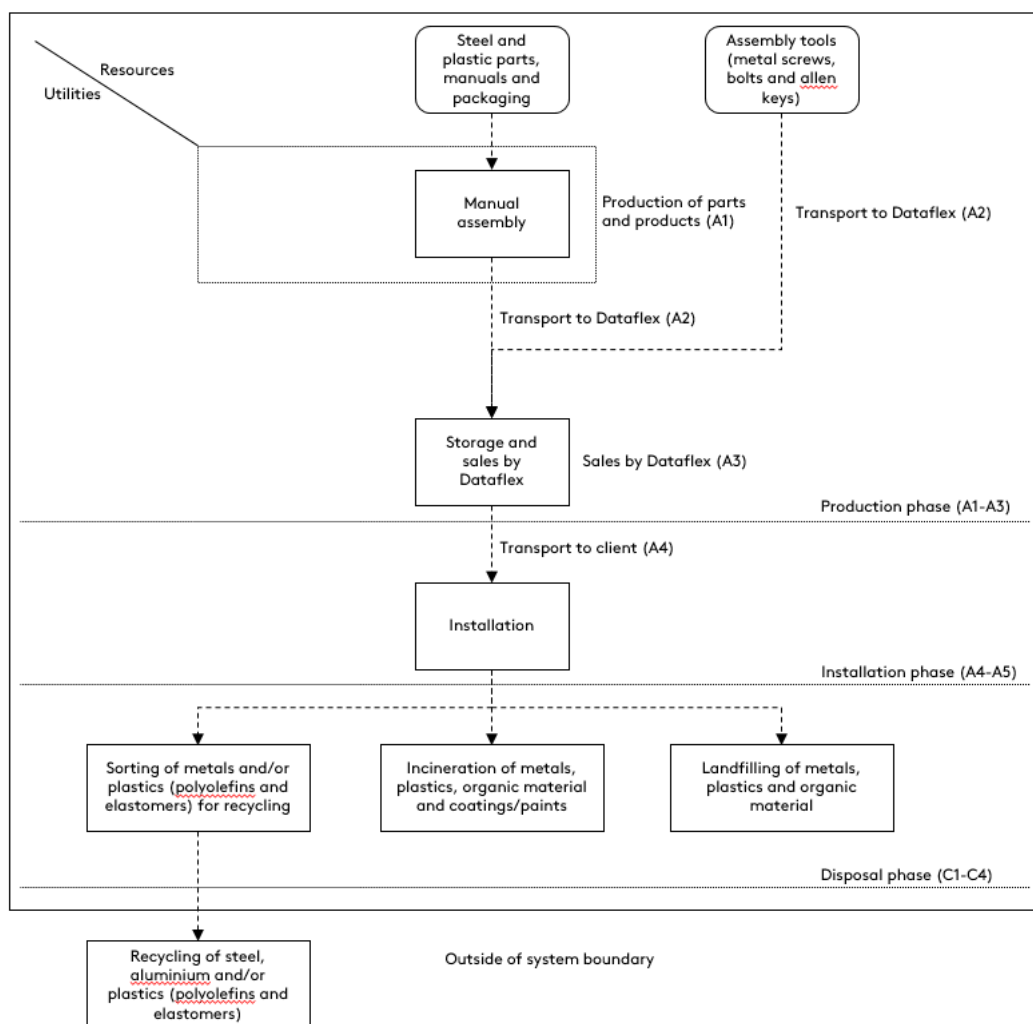


Figure 1: Process tree of 57.142

All parts of the 57.142 are made by subsuppliers who did not supply data. As such, average plastic and metal working references from Ecoinvent 3.4 [8] are used for this supplier. The product is finished at Dataflex. During assembly no resources or materials are consumed, as this is done by hand. The original packaging added by Dataflex' supplier is shredded, however, and used as filling material for repackaging. The exact consumption of this shredding process is unknown, but due to the low amounts and simplicity of the process, this likely amounts to less than 1% of the product's impact. This process is therefore omitted. After use, the products are discarded by customers without the involvement of Dataflex. As such, standard waste scenario's as described in "INSIDE/INSIDE Horizontale PCR" (appendix A) [6] are used.

## System boundary and cut off criteria

In figure 1 the most important processes in the different life cycle stages are visualized as a process tree. Inputs and outputs that leave the system boundary are placed outside the system boundary. For reasons of clarity, not every emission that takes place at each process is visualized. However, all emissions and resource extractions that take place in the life cycle were included in the LCA calculations. In this LCA, the waste processes are declared in the relevant module. In the case of the use of secondary materials or energy recovered from secondary fuels, the system boundary between the system under study and the previous system (providing the secondary materials) is set where outputs of the previous system, e.g. materials, products, building elements or energy, reach the end-of waste state. For all materials, the cut-off is set after any pre-treatment processes such as sorting, as the recovered materials must be applicable for a specific purpose.

In this analysis all environmental inputs - such as resources, energy and waste - were qualified, quantified and translated to environmental impacts through the use of LCA background data from Ecoinvent [8].

### Module A

All relevant resources, materials and services in production phase A1 are based on the composition of the products and Ecoinvent [5] references. Therefore no co-product allocation of energy usage was needed. The impact of modules A1 to A3 has been aggregated. Transport from Dataflex to its clients (A4) is set to 1 km, in accordance with "INSIDE/INSIDE Horizontale PCR" (paragraph 5.6) [6]. The impact of A4 is therefore not representative for the actual impact of the transport. Module A4 in this report should be scaled to the actual transport distance of the products from Dataflex to the respective client. All truck transport takes place with >32 t EURO4 trucks, as is described in "INSIDE/INSIDE Horizontale PCR" (paragraph 6.3.6.2) [6]. This reference from Ecoinvent [8] assumes an average load factor of 50%, in other words: fully loaded transport towards the customer with empty returns. The impact of production and waste processing of tools and fittings required to install the products is seen as the impact of the installation phase (A5).

### Module B

The product consumes no resources or materials and the applied materials do not cause emissions in use.

### Modules C and D

As no demolition takes place, there is no impact for C1. For transport to the waste processing site, distance to sorting/landfilling locations is set to 50 km and to incineration plants to 100 km in accordance with "INSIDE/INSIDE Horizontale PCR" [6]. The waste scenario for all materials has been based on appendix A of "INSIDE/INSIDE Horizontale PCR" [6], and is given in table 2.

Material group	Landfill (%)	Incineration (%)	Recycling (%)	Product re-use (%)
Plastics (rest materials)	20	80	0	0
Polyolefins (i.a. pe,pp)	10	85	5	0
Metals, other / metals (rest materials)	5	5	90	0
Finishing (attached to wood, plastic, metal)	0	100	0	0
Organic (via rest materials)	15	85	0	0
Elastomers (i.a. epdm)	10	85	5	0

Table 2: waste scenario's C3-D

For metals the end-of-waste is reached when the material is sorted, as the sorted metal can replace primary material inputs of metal production. In the case of metals, the (technically equivalent) avoided materials have been determined based on Ecoinvent [8] references used for the primary material that is used in module A1. Sorted steel replaces pig iron as raw material input for steel production

For polyolefins the end-of-waste is reached when the material have been pre-sorted and sorted, as the sorted plastics can be used as raw material input for secondary polyolefin granulate production. The sorted polyolefins therefore indirectly replace plastic (polyolefin) powder as input for granulate production. The impact of the granulation process in Ecoinvent [8] of recycled polyethylene is assumed to be similar to the granulation of virgin polyethylene in Ecoinvent [8].

For elastomers the end-of-waste is also reached when the material have been pre-sorted and sorted, as the sorted elastomers can be used as raw material input for secondary elastomer production (paragraph 2.4). According to the Ecoinvent [8] reference of the elastomer synthetic rubber, the sorted polyolefins indirectly replace raw HDPE (40%) and black carbon (60%) as input for elastomer (synthetic rubber) production. As the processing of sorted elastomers is unknown, it is assumed the same losses occur for elastomers as for polyolefins (4,48%).

All materials that are incinerated are associated with energy recovery, as it is assumed the products are incinerated in the Netherlands or similar countries. The energy yield of Dutch incineration facilities is taken from the SBK Bepalingsmethode [9].

## Environmental indicators

Tables 3 to 6 show the parameters that describe the environmental impacts, resource use, waste categories and other output flows of one unit of the 57.142.

Parameter	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D	Total
Depletion of abiotic resources – elements (ADP - elements)	kg Sb equiv.	1,80E-01	2,89E-06	8,63E-04	0	0	4,58E-04	2,21E-03	4,07E-05	-6,68E-02	1,17E-01
Depletion of abiotic resources - fossil fuels (ADP - fossil fuels)	MJ, net calorific value	2,99E+02	6,34E-03	1,44E+00	0	0	1,00E+00	4,25E+00	8,00E-02	-1,04E+02	2,02E+02
Acidification for soil and water (AP)	kg SO <sub>2</sub> equiv.	1,57E-01	1,50E-06	6,80E-04	0	0	2,39E-04	2,18E-03	2,70E-05	-5,21E-02	1,08E-01
Ozone depletion (ODP)	kg CFC 11 equiv.	1,36E-06	7,30E-11	7,60E-09	0	0	1,16E-08	3,70E-08	6,76E-10	-3,63E-07	1,06E-06
Global warming (GWP)	kg CO <sub>2</sub> equiv.	2,83E+01	3,83E-04	1,30E-01	0	0	6,07E-02	6,94E-01	5,18E-03	-1,08E+01	1,84E+01
Eutrophication (EP)	kg (PO <sub>4</sub> ) <sup>3-</sup> equiv.	1,83E-02	2,65E-07	1,10E-04	0	0	4,19E-05	4,25E-04	3,91E-06	-4,50E-03	1,44E-02
Photochemical ozone creation (POCP)	kg ethene equiv.	1,02E-02	6,27E-08	5,32E-05	0	0	9,94E-06	1,11E-04	1,82E-06	-5,03E-03	5,36E-03

Table 3: Environmental impacts

Parameter	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D	Total
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ, net calorific value	3,08E+01	8,79E-05	1,27E-01	0	0	1,39E-02	4,77E-01	3,84E-03	-1,57E+01	1,58E+01
Use of renewable primary energy resources used as raw materials	MJ, net calorific value	1,22E+01	0,00E+00	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,22E+01
Total use of renewable primary energy resources	MJ, net calorific value	3,75E+01	8,79E-05	1,27E-01	0	0	1,39E-02	4,77E-01	3,84E-03	-1,57E+01	2,24E+01
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	MJ, net calorific value	3,18E+02	6,45E-03	1,57E+00	0	0	1,02E+00	4,85E+00	8,41E-02	-1,05E+02	2,20E+02
Use of non-renewable primary energy resources used as raw materials	MJ, net calorific value	2,47E+00	0,00E+00	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,47E+00
Total use of non-renewable primary energy resources	MJ, net calorific value	3,20E+02	6,45E-03	1,57E+00	0	0	1,02E+00	4,85E+00	8,41E-02	-1,05E+02	2,23E+02
Use of secondary material	kg	2,93E+00	0,00E+00	1,48E-02	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,94E+00
Use of renewable secondary fuels	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non-renewable secondary fuels	MJ, net calorific value	0,00E+00	0,00E+00	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water	m <sup>3</sup>	1,45E-01	3,29E-07	7,40E-04	0	0	5,21E-05	2,25E-03	1,69E-05	-2,28E-02	1,26E-01

Table 4: Resource use



Parameter	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D	Total
Hazardous waste disposed	kg	6,04E-03	4,48E-08	9,03E-06	0	0	7,10E-06	9,88E-03	4,64E-07	-6,29E-04	1,53E-02
Non-hazardous waste disposed	kg	5,40E+00	5,22E-04	3,31E-02	0	0	8,27E-02	4,42E-01	2,81E-01	-9,89E-01	5,25E+00
Radioactive waste disposed	kg	6,68E-04	4,13E-08	3,94E-06	0	0	6,56E-06	2,12E-05	3,95E-07	-9,52E-05	6,05E-04

Table 5: Waste categories

Parameter	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D	Total
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	2,43E-02	0	0	0,00E+00	3,50E+00	0,00E+00	0,00E+00	3,52E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ per energy carrier	0,00E+00	0,00E+00	0,00E+00	0	0	0,00E+00	1,25E+01	0,00E+00	0,00E+00	1,25E+01

Table 6: Other output flows

## References

- [1] 'ISO 14040: Environmental management - Life cycle assessment – Principles and Framework', International Organization for Standardization, ISO14040:2006.
- [2] 'ISO 14044: Environmental management - Life cycle assessment - Requirements and guidelines', International Organization for Standardization, ISO14044:2006.
- [3] 'ISO 14025: Environmental labels and declarations -- Type III environmental declarations -- Principles and procedures', International Organization for Standardization, ISO14025:2006.
- [4] 'NEN-EN 15804: Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products', NEN-EN 15804:2012+A1:2013.
- [5] Ecochain, 2017, web: <http://app.Ecochain.com>.
- [6] INSIDE/INSIDE Horizontale PCR; version 1.2, 2018-12-10
- [7] INSIDE/INSIDE PCR Accessoires; version 1.1, 2018-12-12
- [8] Ecoinvent database version 3.4
- [9] 'SBK Bepalingsmethode Milieuprestatie Gebouwen en GWW werken', Stichting Bouwkwiteit, versie januari 2019.